



Model 1535 Tube Conveyor (Shown)
1525, 1530, 1535, 1540, 1545. 1550 Tube Conveyor


Capacity	Up to 6,000 BPH (Capacity depends on material, moisture, density, and angle)
Tubing	10" Diameter Tubes
Belt	15" 2-Ply Chevron
Belt Speed	Standard 600 FPM
Top Drive Options	Electric or Hydraulic
Hopper	Collapsible Canvas Hopper
Unit Width	7' 9" Outside Wheel Width
Construction	Carbon or Stainless Steel Available
Standard Accessories	Wind Guards
Optional Accessories	Wheel Kit, Bottom Guards



Proudly designed and manufactured in the USA.

800.311.9626 | WWW.TUBECONVEYOR.COM

1500 SERIES TOP DRIVE TUBE CONVEYOR

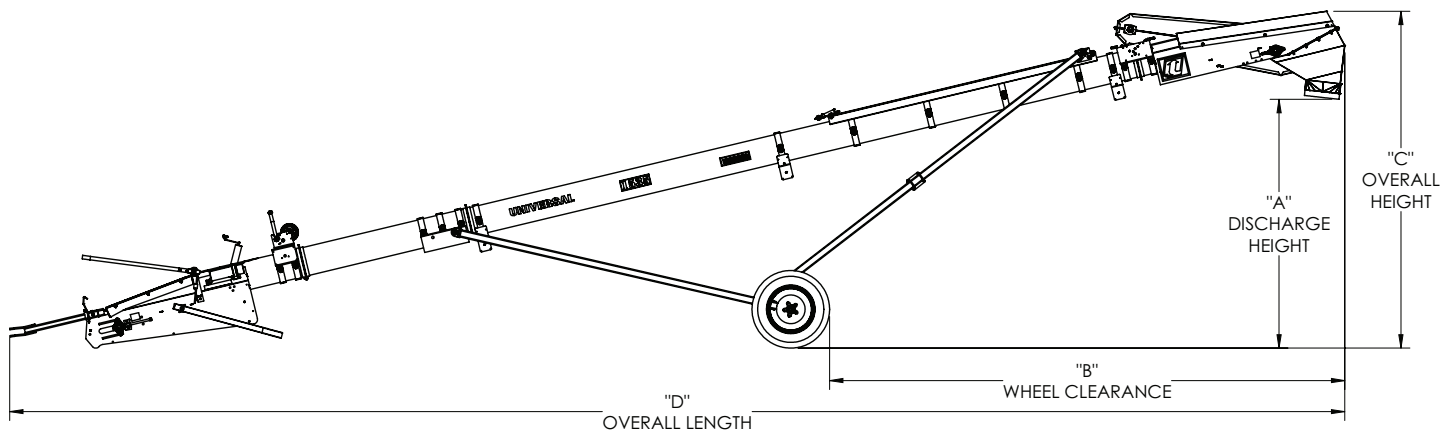

	Discharge Height* (A)	Wheel Clearance* (B)	Overall Height* (C)	Transport Height† (C)	Overall Length Lowered (D)	Electric Motor HP	Hyd. Req. GPM
1525ETD	10' ¼"	10' 6½"	12' 7"	7' 2"	29' 1"	7.5	N/A
1525HTD	10' ¼"	12' ¼"	12' 7"	6' 7¾"	29' 2"	N/A	14
1530ETD	12' 1¾"	12' 4¼"	14' 8¼"	9' 7¾"	33' 7"	7.5	N/A
1530HTD	12' 1¾"	14' 6½"	14' 8¼"	7' 5¾"	34' 1¼"	N/A	14
1535ETD	14' 3"	14' 3"	16' 9½"	9' 2"	38' 10¾"	7.5	N/A
1535HTD	14' 3"	16' 9¾"	16' 9½"	10' ½"	38' 7"	N/A	14
1540ETD	16' 4¼"	16' 9¾"	18' 11"	11' 1"	43' 6¾"	10	N/A
1545ETD	18' 5¾"	19' 3¼"	21' ¼"	9' 1¾"	49' 1¼"	10	N/A
1545HTD	18' 5¾"	21' 4½"	21' ¼"	9' 10¾"	48' 11¼"	N/A	14

* At 25°

† Transport Height based on 18" Hitch Height

Specifications are subject to change without notice.

Uni Tube® is a brand of Universal Industries®



Unit application, location and specifications determine the type, quantity and/or placement of electrical, electrical safety or other safety controls required. Whether these controls are supplied by Universal Industries or another supplier, all OSHA safety and health standards, the National Electrical Code and local codes must be met and followed. Because we constantly strive to provide the finest material handling equipment, establishing industry standards, specifications must remain subject to change without notice.