

**UNIVERSAL LOW PROFILE TRANSFER CONVEYOR
FEATURES A COLLAPSIBLE HOPPER THAT IS THE
LONGEST IN THE INDUSTRY. EASILY REACHES
UNDER BELLY-DUMPS WITH NO MESS WHEN DONE.**




SPECIFICATIONS

Model	Low-Profile Transfer Conveyor
Capacity	Up to 7,500 BPH *Capacity depends on material moisture and density
Tubing	10" diameter 14 gauge tubes
Belt	15" 2 ply chevron
Belt Speed	300-550 FPM
Drive	Electric 5 HP, Gas 8 HP or Hydraulic Drive
Hopper	Collapsible canvas hopper
Construction	Carbon Steel or Stainless Steel available for all models

*Specifications subject to change

**THE TRADITION OF
EXCELLENCE CONTINUES!**

Universal Low-Profile Transfer Conveyor

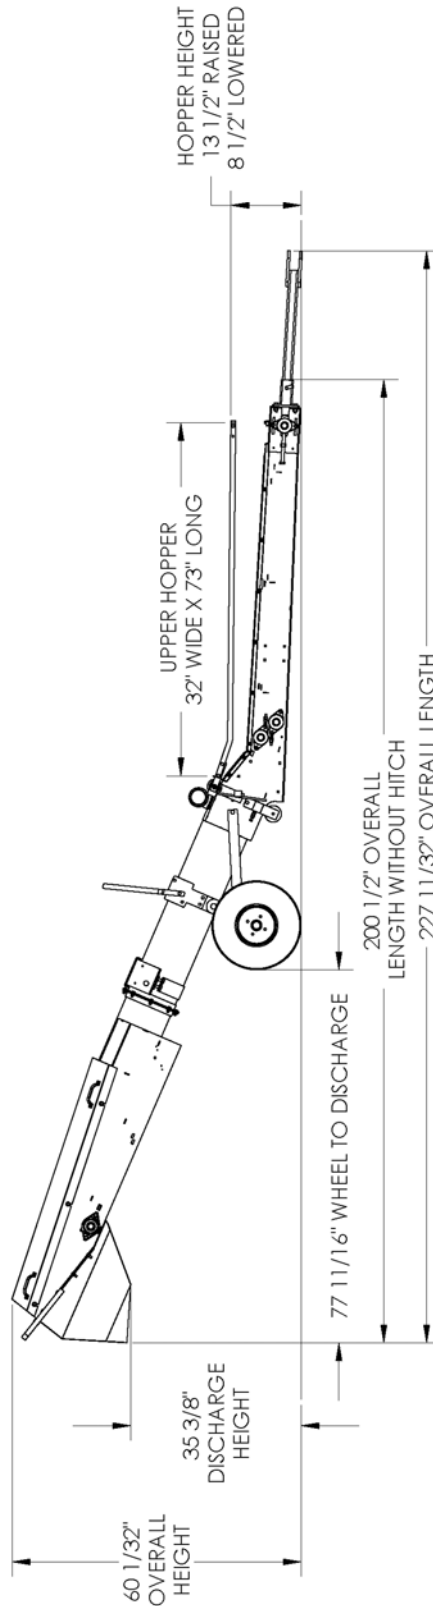

NOTE: Unit application, location and specifications determine the type, quantity and/or placement of electrical, electrical safety or other safety controls required. Whether these controls are supplied by Universal Industries or another supplier, all OSHA safety and health standards, the National Electrical Code and local codes must be met and followed. Because we constantly strive to provide the finest material handling equipment, establishing industry standards, specifications must remain subject to change without notice.



5800 Nordic Drive • PO Box 308 • Cedar Falls, IA 50613-0308
1-800-311-96266 • 319-277-7501 • FAX 319-277-2318
www.tubeconveyor.com • sales@universalindustries.com

Printed in U.S.A. © Copyright 2009