



## 1537 Short Field Loader® (Shown)

1532, 1537, 1542 & 1547 Field Loader & Short Field Loader®


Capacity	Up to 7,500 BPH (Capacity depends on material, moisture, density, and angle)
Tubing	10" Diameter Tubes
Belt	15" 2-Ply Chevron
Belt Speed	Standard 600 FPM
Top Drive Options	Electric, Hydraulic, or Dual
Hopper	Collapsible Canvas Hopper (Collapsed = 9", Extended = 15")
Unit Width	7' 9" Outside Wheel Width
Construction	Carbon or Stainless Steel Available
Optional Accessories	Wheel Kit, Bottom Guards, and Self-Propel Kit



Proudly designed and manufactured in the USA.

800.311.9626 | [WWW.TUBECONVEYOR.COM](http://WWW.TUBECONVEYOR.COM)

# 1500 SERIES TOP DRIVE FIELD LOADER & SHORT FIELD LOADER®

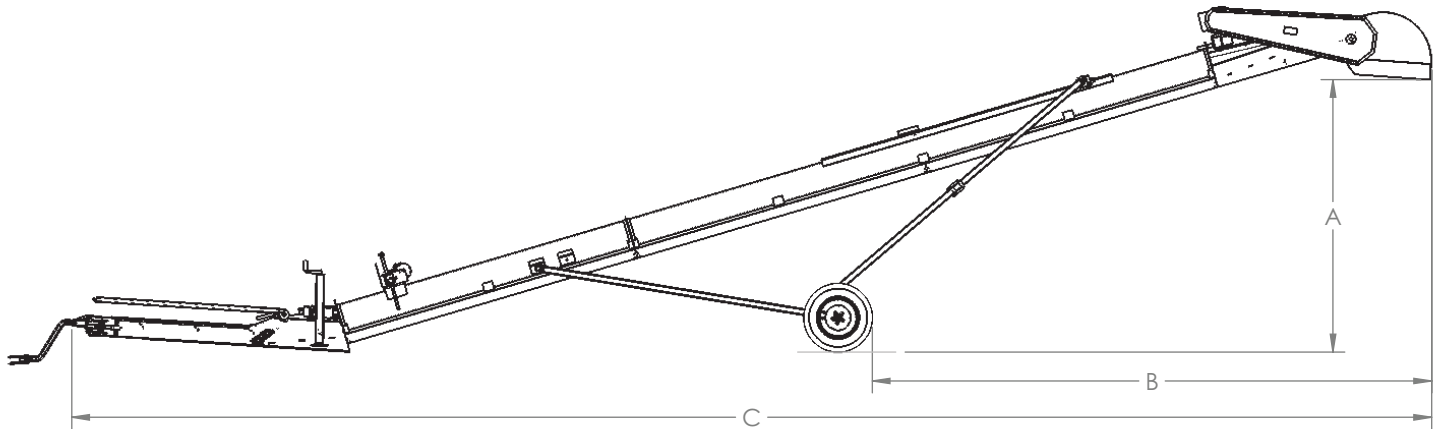

A = Discharge Height  
B = Wheel Clearance  
C = Overall Length

	Transport		Lowered		25 Degrees		Max	Other Information		
	Overall Height At 18" Hitch Height	C	A	B	A	B	A	Width	Electric HP	GPM Req.
<b>1537 SFL</b>	11' 3¼"	42' 3¼"	9' 6"	17' 6"	14' 6½"	16' 9"	17' 11"	7' 9"	10 (1PH/3 PH)	14
<b>1537 FL</b>	10' 7¼"	45' 4½"	9'	18' 5¾"	14' 9½"	17' 7"	17' 9"	7' 9"	10 (1 PH/3 PH)	14
<b>1547 SFL</b>	13' 1¼"	52' 2"	11' 3"	21' 7¼"	18' 9½"	18' 9¼"	20' 8"	7' 9"	10 (1 PH/3 PH)	14
<b>1547 FL</b>	12' 2¾"	55' 2½"	10' 3¼"	22' 6¾"	19' ¼"	19' ¼"	20' 1"	7' 9"	10 (1 PH/3 PH)	14

Specifications are subject to change without notice.

Uni Tube® is a brand of Universal Industries®



Unit application, location and specifications determine the type, quantity and/or placement of electrical, electrical safety or other safety controls required. Whether these controls are supplied by Universal Industries or another supplier, all OSHA safety and health standards, the National Electrical Code and local codes must be met and followed. Because we constantly strive to provide the finest material handling equipment, establishing industry standards, specifications must remain subject to change without notice.