



1837 BinBuster® Field Loader (Shown)

1837 & 1847 Field Loader & Short Field Loader®

Capacity	Up to 9,000 BPH (Capacity depends on material, moisture, density, and angle)
Tubing	12" Diameter Tubes
Belt	18" 2-Ply Chevron
Belt Speed	Standard 600 FPM
Top Drive Options	Electric, Hydraulic, or Dual
Hopper	Collapsible Canvas Hopper (Collapsed = 9", Extended = 15")
Construction	Carbon Steel
Optional Accessories	Wheel Kit, Bottom Guards


OUTPERFORMS ANY 10" U-TROUGH BIN UNLOAD AUGER!



Proudly designed and manufactured in the USA.

800.311.9626 | WWW.TUBECONVEYOR.COM

1800 SERIES TOP DRIVE BINBUSTER® FIELD LOADER & SHORT FIELD LOADER®

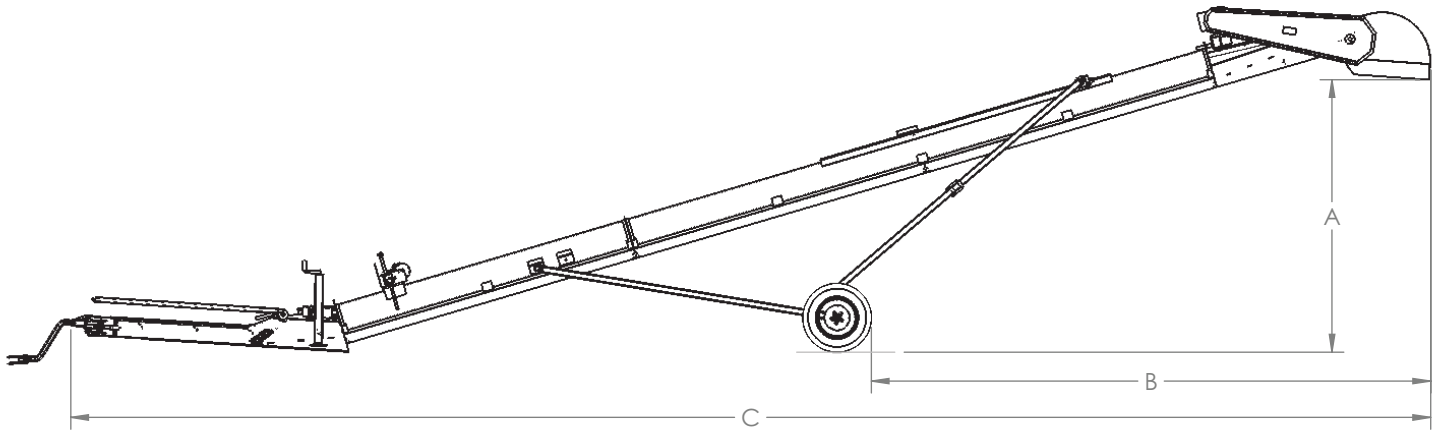

A = Discharge Height
B = Wheel Clearance
C = Overall Length

	Transport		Lowered		25 Degrees		Max	Other Information		
	Overall Height At 18" Hitch Height	C	A	B	A	B	A	Width	Electric HP	GPM Req.
1837 SFL	11' 4"	42' 3¼"	9' 4¼"	17' 6"	14' 7½"	14' 7½"	17' ¾"	7' 9"	10 (1PH/3 PH)	14
1837 FL	10' 11½"	45' 3¼"	9' 3¾"	18' 5"	14' 10½"	14' 10½"	16' 4½"	7' 9"	10 (1 PH/3 PH)	14

Specifications are subject to change without notice.

Uni Tube® is a brand of Universal Industries®



Unit application, location and specifications determine the type, quantity and/or placement of electrical, electrical safety or other safety controls required. Whether these controls are supplied by Universal Industries or another supplier, all OSHA safety and health standards, the National Electrical Code and local codes must be met and followed. Because we constantly strive to provide the finest material handling equipment, establishing industry standards, specifications must remain subject to change without notice.