



Model 2275 Tube Conveyor (Shown)

2235, 2245, 2255, 2265, 2275, 2285, 2295 Tube Conveyor


Capacity	Up to 10,000 BPH (Capacity depends on material, moisture, density, and angle)
Tubing	14" Diameter Tubes
Belt	22" 2-Ply Chevron
Belt Speed	Standard 600 FPM
S-Drive Options	Electric or PTO
Hopper	Collapsible Canvas Hopper
Construction	Carbon Steel Available
Accessories	Optional Wind Guards on 2235-2255 Conveyors, Standard Wind Guards on 2265-2295 Conveyors
Optional Accessories	Bottom Guards



Proudly designed and manufactured in the USA.

800.311.9626 | WWW.TUBECONVEYOR.COM

2200 SERIES S-DRIVE TUBE CONVEYOR

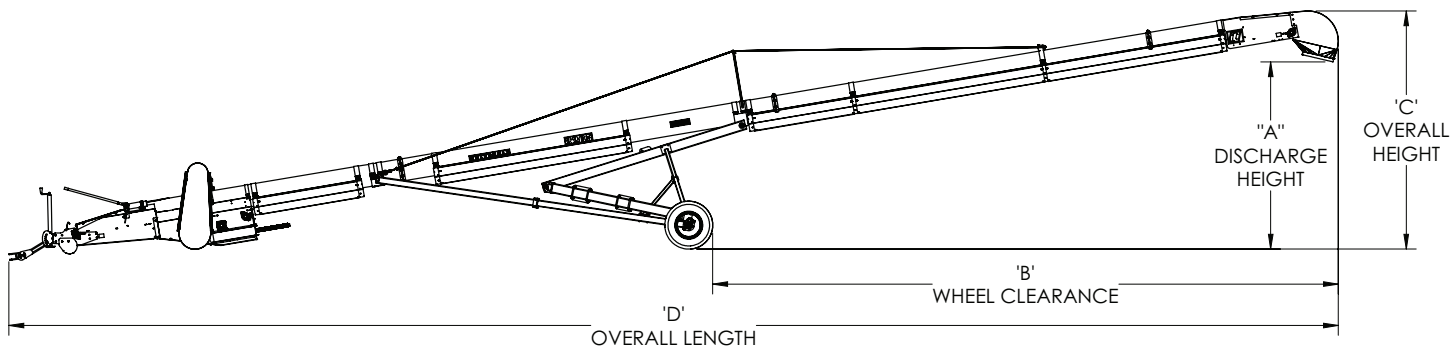

UniTube® Conveyor Measurements								Operating Power Requirements	
	Discharge Height* (A)	Wheel Clearance* (B)	Overall Height* (C)	Transport Height† (C)	Overall Length Lowered (D)	Outside Wheel Width	Undercarriage Style	Electric Motor HP	Hydraulic Requirements GPM
UT2235	14' 5½"	15' 4¾"	16' 10"	9' 7¾"	39' 9¾"	8' 6"	A-Frame	15	30
UT2245	18' 10½"	22' 8¾"	21' 3"	11' 3¾"	49' 6¾"	8' 6"	A-Frame	20	40
UT2255	22' 11"	22' 10"	25' 3½"	9' 11¼"	60' 2¼"	11' ½"	Scissor Lift	25	50
UT2265	27' 1¾"	30' 5½"	29' 6¼"	10' 11"	70' 1"	11' ½"	Scissor Lift	30	60
UT2275	31' 4½"	30' 3¼"	33' 9"	12' 11"	78' 4½"	11' 6¼"	Scissor Lift	40	80
UT2285	35' 7"	36' 2"	37' 11¾"	13' 2½"	89' 11¾"	11' 6¼"	Scissor Lift	40	80
UT2295	40'	42' 5½"	42' 4½"	15' 1½"	99' 9¾"	11' 6¼"	Scissor Lift	40	80

* At 25°
 † Transport Height based on 18" Hitch Height

Specifications are subject to change without notice.

Uni Tube® is a brand of Universal Industries®



Unit application, location and specifications determine the type, quantity and/or placement of electrical, electrical safety or other safety controls required. Whether these controls are supplied by Universal Industries or another supplier, all OSHA safety and health standards, the National Electrical Code and local codes must be met and followed. Because we constantly strive to provide the finest material handling equipment, establishing industry standards, specifications must remain subject to change without notice.